

Manufacturer of True Sine Wave Power Inverters and Related Products

MX SERIES POWER INVERTERS



MX SERIES FAMILY

- **N+1 REDUNDANT**
- **EXPANDABLE**
- **REMOTE SWITCHING**
- **TRUE SINE WAVE**
- **“HOT” INSERTABLE**
- **1000 WATT MODULES**
- **OPTIONAL SNMP**



EXELTECH manufactures the world's first truly **redundant, modular** inverter system; the **most reliable** inverter system available. No single malfunction will cause the inverter system to fail. **Modules are "hot" insertable.** Power levels are **expandable**, and modules can be added or replaced **without interruption in power** to your critical loads.

The MX system can be configured for **power levels from 1 to 20KW with 120 Vac** output. Up to 40KW at 240 Vac bi-phase or 60KW at 208 Vac 3 phase with many input and output voltages also available.

A control card and any number of additional 1000 Watt power modules combine to make a standard inverter. This type of system can be expanded as power requirements increase, and upgraded to be N+1 redundant as desired.

The MX system is **extremely compact and lightweight.** Power modules weigh only 7 lbs. Each.

Output voltage is precisely regulated, so that no measurable voltage change occurs on the output as input voltage fluctuates. Similarly, less than 0.5 volt change in output voltage will occur when the output load varies from 0 to 100% of rated power. With distortion of 2% maximum, this inverter offers **the cleanest sine wave power available.**

Models are available which cover all standard battery systems. Custom models can be designed to meet your specific input voltage requirements.

MX SERIES MODULE DESCRIPTION

The *Exeltech MX* Series of inverters is a modular system which can be assembled in many combinations to afford the user infinite flexibility. Options such as AC distribution, AC disconnect, metering, DC disconnect, DC distribution, transfer switch and maintenance bypass switch are also available; (see accessories).

The building blocks of the system are as follows:

- 1.) Power Module - A 1000 Watt slave power inverter. It requires drive signals from a Master Module or Control Card as described below. This module is the backbone of the inverter system.
- 2.) Master Module - A 1000 Watt power inverter which contains all the electronics necessary to operate. Requires an enclosure to provide connections to the battery and AC output. It can also operate up to 19 slave Power Modules. If this module is used, the system cannot be fully redundant.
All MX systems require either a master module or at least one control card.
- 3.) Control Card - Generates all the signals necessary to operate up to 20 Power Modules. The card itself will not generate any AC output power nor does any power flow through it. This card can be paralleled with another Control Card to generate a redundant set of control signals to form the basis of a completely redundant inverter system.
All MX systems require either a master module or at least one control card.
- 4.) Alarm Card - Can be used in conjunction with a redundant or non redundant inverter to provide various alarm output signals via LED's and alarm contact closures. Must be included in redundant systems to detect failure of control card.
- 5.) Transfer Switch - Provides the same functions as the alarm card, plus provides a relay to transfer AC power to the load, from either the inverter or the utility input. Use only with systems 7KW of or less.

The above modules can be placed in the following enclosures; Installations can either be free standing or in standard relay racks.


- 1.) 19" cage assembly - Compatible with a 19" relay rack. The smallest cage which can contain a redundant system. Available in the following configurations:
 - 19A - Basic configuration for a redundant system. Holds up to 4 Power Modules, 2 Control Cards and either a Transfer Switch, System Monitor Card or an Alarm Card.
 - 19B - Used as an expansion rack or may be used as an expandable, non redundant inverter, up to 5 KW.
This configuration will not accept X-fer Switch, alarm card or control cards.
- 2.) 23" cage assembly - Compatible with a 23" relay rack.
 - 23A - Basic configuration for a redundant system. Holds up to 5 Power Modules, 2 Control Cards and either a Static Transfer Switch, Transfer Switch, System Monitor II or an Alarm Card.
 - 23B - Used as an expansion rack or may be used as an expandable, non redundant inverter, up to 6 KW.
This configuration will not accept X-fer Switch, alarm card or control cards.
- 3.) 7" cage assembly - for 1 or 2KW systems when redundancy is not required.
 - 7C - Consists of 1 Transfer Switch and 1 Master Module.
This configuration will not accept an alarm card or control cards.
 - 7B - Expandable up to 2KW. 1 Master Module and 1 Power Module.
This configuration will not accept X-fer switch, alarm card or control cards.
- 4.) 9" cage assembly- for 1-3KW systems when redundancy is not required.
 - 9C - Consists of Transfer Switch, 1 Master Module and 1 Power Module.
This configuration will not accept an alarm card or control cards.
 - 9B - Expandable up to 3KW. 1 Master Module and 2 Power Modules.
This configuration will not accept X-fer Switch, alarm card or control cards.

MX SERIES SYSTEM DESCRIPTION

The *Exeltech MX* Series of inverters is available in three basic architectures; redundant, upgradable and expandable. Different options and sizes are available to fit varying applications. As a benefit of the *MX* series modular design, power levels are expandable in any system, as power requirements increase.

1.) **N+1 Redundant-Expandable Inverter System:** For applications where reliability and maintainability are paramount, the N+1 redundant system offers the most cost effective method of achieving redundancy and the ability to maintain the system while loads remain on line. All cards (except 12 Vdc) are "hot" insertable to allow maintenance without interrupting power to critical loads. Designing the power level with N+1 number of power modules, allows for redundancy without necessitating the purchase of a duplicate system. (An A/B Buss option is available, which adds to system reliability).

A redundant system consists of:

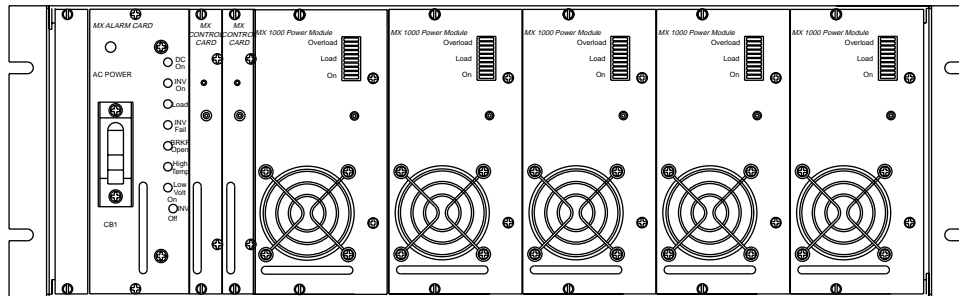

1 ea. Alarm Card or System Monitor Card
part # H (100 Vac)
A (120 Vac)
B (120 Vac)
C (120 Vac)
F (230 Vac)

2 ea. Control Cards
part # LL (100 Vac)
CC (120 Vac)
EE (230 Vac)

At least 3 Power Modules
part # P (100 Vac)
P (120 Vac)
R (230 Vac)

1 ea. Cage assembly
part # 1A (19" cage)
2A (23" cage)

Options: 1 ea. X-fer switch
part # G (100 Vac)
S (120Vac)
X (120 Vac)
Z (230 Vac)

X-fer switch includes alarms and replaces the alarm card.


expansion rack
part # 1B (19" cage)
2B (23" cage)

...integrates with rack A for accommodating additional power modules, up to total rating of 20KW. Additional control cards and a larger X-fer switch may be required. Please call the factory for assistance.

2.) **Upgradable Inverter System:** The *Upgradable system* offers the flexibility to add a X-fer switch or alarm card and Full Redundancy for future requirements. A minimum system with as little as one control card and one power module can be upgraded in the future to include additional power modules, X-fer switch or alarm card and an additional control card for full redundancy (see figure II).

MX SERIES SYSTEM DESCRIPTION

Figure II.

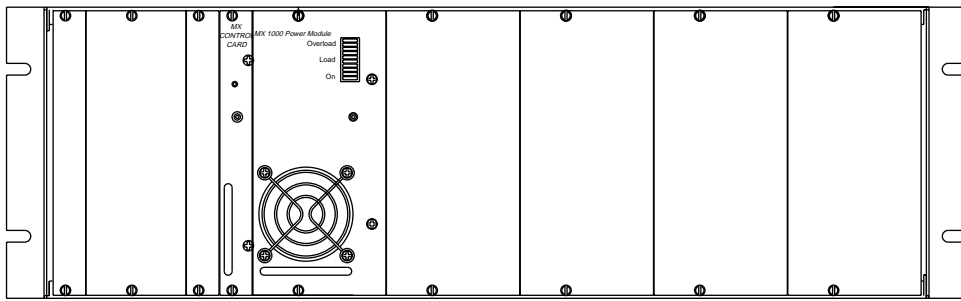

1 ea. Cage assembly
part # 1A (19" cage)
2A (23" cage)

Options:

1 ea. X-fer Switch
part # G (100 Vac)
S (120 Vac)
X (120 Vac)
Z (230 Vac)
1 ea. Alarm Card
part # H (100 Vac)
A (120 Vac)
B (120 Vac)
C (120 Vac)
F (230 Vac)

1 ea. Control Card
part # L*(100 Vac)
C*(120 Vac)
E*(230 Vac)

1 ea. Power Module
part # P (100 Vac)
P (120 Vac)
R (230 Vac)

3.) **Expandable inverter system:** This configuration can be used as an independent inverter system (figure III), or to expand power levels of existing **MX** systems (see stacked systems). By using one master module, a system may be expanded to include a X-fer switch and additional power modules (see figure IV). 1KW inverters with a X-fer switch use the 7" or 9" (part # 7C, 9C) cage. 1KW, 2KW and 3KW inverters without a X-fer switch use the 7" or 9" (part number 7B, 9B) cage assembly.

Figure III.


1 ea. Cage assembly_
part # 1B (19" cage)
2B (23" cage)
7B (7" cage)
9B (9" cage)
expansion rack
(see stacked
systems)

1 ea. Cage assembly
part # 1A (19" cage)
2A (23" cage)
7C (7" cage)
9C (9" cage)

Options:

1 ea. X-fer Switch
part # G (100 Vac)
S (120 Vac)
X (120 Vac)
Z (230 Vac)


1 ea. Master Module¹
part # Q* (100 Vac)
M* (120 Vac)
N* (230 Vac)

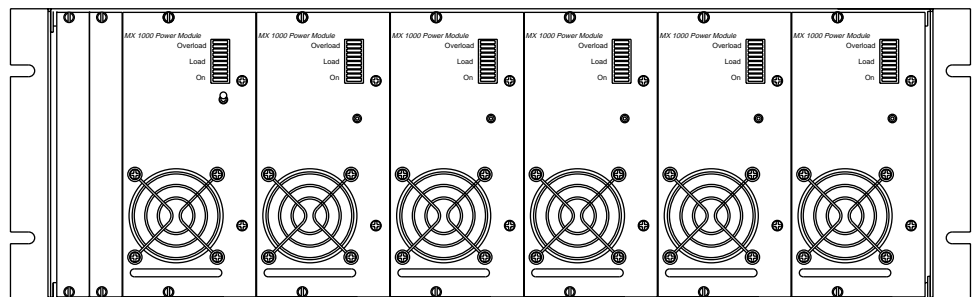

Up to 5
Power Modules
part # P (100 Vac)
P (120 Vac)
R (230 Vac)

1 ea. Master Module¹
part # Q* (100 Vac)
M* (120 Vac)
O* (230 Vac)

Figure IV.

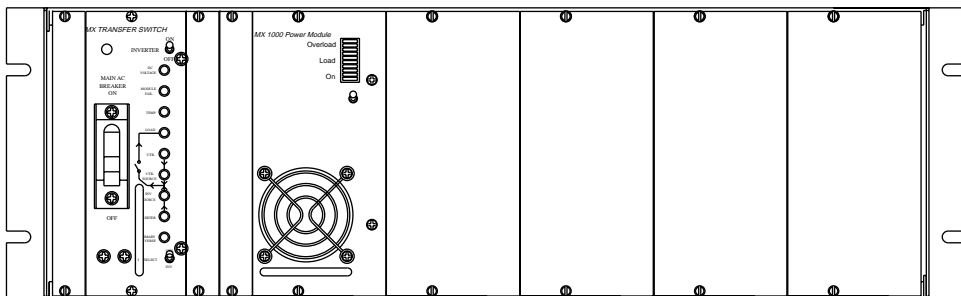

¹ Alarm card is not an option on this configuration

MX SERIES SYSTEM PART NUMBER

Use the Design Chart to formulate the 15 digit model number.

EXELTECH MX SERIES

MODEL NUMBER

Step 1: Enter the two character code for cage assembly size and configuration.

Step 2: When a transfer switch or alarm card is used, enter the single character code for that card. 2nd and 3rd characters designate option level of transfer switch or alarm card. Enter 00 for standard module, if no alarm card or transfer switch use "B" configuration backplane, enter (***)

Step 3: Alpha character assigned by EXELTECH to represent changes or revision levels in racks, alarm cards, or transfer switch. Enter (-). EXELTECH will assign revision level. See revision level chart on www.exeltech.com for the most current revision list.

Step 4: Enter the two character code for Control Card(s) or Master Module. There is not an application where both are used. Enter (M*) or (C*) if only one is used.

Step 5: To designate power level, enter the number of power modules required. Redundant systems require continuous load rating plus one additional power module(* if none used).

Step 6: To designate output voltage of the power module required, enter the single character code(* if none used).

Step 7: Single alpha character assigned by EXELTECH represents changes or revision levels in Control Cards, Master Modules, or Power Modules. Enter (-). EXELTECH will assign revision level. See revision level chart on www.exeltech.com for the most current revision list.

Step 8: To designate input voltage, enter the single character from the VDC voltage chart below.

Vdc INPUT VOLTAGE CHART						
DC Volts	12	24	32	48	66	108
Designation	1	2	B	4	E	I

Step 9: Output frequency is designated by using the first number of the frequency (5for 50Hz, 6 for 60Hz, 4 for 400Hz).

Step 10: For options, enter two digit code. If no option, enter (00).

EXAMPLE: A redundant system with an alarm card, to fit a 23" wide cage, for powering a 4000 watt continuous load, at 120Vac, 60Hz with 48Vdc input would require the following model number...

2AA00ACC5P-4600

MX SERIES MODULE PART NUMBER

EXELTECH MX SERIES MODULE NUMBER

MX - - - - -

Step 1: Model number always starts with MX.

Step 2: To designate a cage assembly, enter the two character code from the design chart. When ordering a power module or master module, enter a "K". If ordering any other module, enter an asterisk(*).

Step 3: To designate the type of module, enter the single character code from the design chart. To designate cage assembly, enter an asterisk(*).

Step 4: To designate input voltage, enter the single character code from the **Vdc INPUT VOLTAGE CHART** below. If ordering an alarm card, transfer switch or cage assembly, enter an asterisk(*).

Vdc INPUT VOLTAGE CHART						
DC Volts	12	24	32	48	66	108
Designation	1	2	B	4	E	I

Step 5: Output frequency is designated by using the first number of the frequency(5 for 50Hz, 6 for 60Hz, 4 for 400Hz). If ordering a transfer switch, alarm card, power module or cage assembly, enter an asterisk(*).

Step 6: This space designates current revision level, and is for EXELTECH use only. If no revision is in use for this module, no number or character will be used.

Step 7: To designate option, enter the code from the option chart below. If no option is required please leave blank.

OPTION CHART	
Option	Code
Conformal coating	07
Low idle current	08

MODULE EXAMPLES: A 12Vdc, 120Vac, 60Hz master module would require the following module number...

MXK-M-1-6-1

A 48vdc, 120Vac, 60Hz power module with conformal coating option would require the following module number...

MXK-P-4-*-1-07

CAGE ASSEMBLY EXAMPLE: A 19" redundant cage, 120Vac would require the following module number:

MX1A-*-*-2

MX SERIES SYSTEMS DESIGN CHART

MX SYSTEMS DESIGN CHART								
SYSTEMS REQUIRED	CAGE ASSY SIZE AND CONFIG.	Use X-fer or Alarm Card		Use CC or MM		POWER MODULE	AVAIL C- Current F- Future	
		X-FER SWITCH		ALARM CARD	CONTROL CARD			MASTER MODULE
		100Vac	G	H	L* or LL			Q*
		120Vac	X or S	A, B or C	C* or CC			M*
230Vac	Z	F	E* or EE	O*	R			
Redundant Upgradable 19" Cage	1A	0 or 1 ^{1,4}	0 or 1 ^{1,4}	0, 1, 2 ⁵	0	up to 4 ³	C	
Redundant Upgradable 23" Cage	2A	0 or 1 ^{1,4}	0 or 1 ^{1,4}	0, 1, 2 ⁵	0	up to 5 ³	C	
Expandable 19" Cage	1A	0 or 1	0	0	1	up to 3	C	
Expandable 23" Cage	2A	0 or 1	0	0	1	up to 4	C	
Expandable 7" Cage	7B	0	0	0	1	0 or 1	C	
Expandable 9" Cage	9B	0	0	0	1	up to 2	C	
Expandable 19" Cage	1B	0	0	0	1	up to 4	C	
Expandable 23" Cage	2B	0	0	0	1	up to 5	C	
Expandable 7" Cage	7C	0 or 1	0	0	1	0	C	
Expandable 9" Cage	9C	0 or 1	0	0	1	0 or 1	F	
Split Phase 19" Cage	1E	0	0	0	2	0 or 2	F	
Split Phase 23" Cage	2E	0	0	0	2	0,2,4	F	
Split Phase 7" Cage	7E	0	0	0	2	0	C	
3 Phase 19" Cage	1F	0	0 or 1 ²	0	3	0	F	
3 Phase 23" Cage	2F	0	0 or 1 ²	0	3	0 or 3	C	
3 Phase 9" Cage	9F	0	0	0	3	0	C	

¹ 1 per phase

² Alarm with a subset of functions (multi-phase option A13)

³ System is not fully redundant with less than 3 power modules

⁴ Minimum 1 Alarm Card or 1 X-fer Switch required for redundant system

⁵ Minimum 2 Control Cards for redundant system.

NOTE: Any modification to any Stack System must be performed in the factory.

MX SERIES POWER INVERTER SPECIFICATIONS

OUTPUT POWER

CONTINUOUS POWER	SURGE POWER (3 seconds)	NO LOAD POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	WEIGHT LBS.
1000W	2200W	20W	230+/-6%	4.3	7.5
1000W	2200W	20W	117+/-6%	8.6	7.5
1000W	2200W	20W	100+/-6%	10.0	7.5

INPUT

MODEL VOLTAGE	MINIMUM (TYPICAL)	SYSTEM (TYPICAL)	MAXIMUM (TYPICAL)	TYPICAL EFFICIENCY @ FULL POWER	PEAK EFFICIENCY @ 1/3 POWER
12V	10.4/10.6*	13.8V	17V	85%	87%
24V	19/21V*	27.6V	34V	87%	89%
32V	26.5/28V*	36.8V	45V	87%	89%
48V	41.5/42.5V*	55.2V	62V	87%	89%
66V	57.5/58.5V*	75.9V	94V	88%	90%
108V	94/95V*	124V	149V	88%	90%

*indicates typical cut-off voltage/warning buzzer voltage

GENERAL

CONDITIONS	MINIMUM	TYPICAL	MAXIMUM
WAVEFORM	-	SINUSOIDAL	-
LINE REGULATION	-	.1%	.5%
LOAD REGULATION	-	.3%	.5%
DISTORTION	-	1.5%	2%
FREQUENCY*	-.1%	NOMINAL	+.1%

*50, 60, 400Hz nominal

See www.exeltech.com for more data regarding MX Series inverters.

PROTECTION CIRCUITRY

Over Voltage:	Shutoff at maximum input voltage, per input conditions.
Under Voltage:	Shutoff at minimum input voltage, per input conditions.
Thermal:	105 C internal temperature. Warning buzz 5 C before shutoff.
Output Short:	Unit shuts off: Circuit breaker protected and electronically limited.

ENVIRONMENTAL

Temperature:	-25 to 40 C full power, derate 20% per 10 C. Above 40 C.
Humidity:	5 to 95% non-condensing
Altitude:	-200 to 10k feet full power, derated above 10k
Audible Noise:	Less than 45dba
Cooling:	1KW-Thermostatically controlled forced air
Finish:	Polyurethane base paint
Warranty:	Full year parts and labor.

MECHANICAL

Four case sizes are available; all are: 7" high X 15" deep.	
19 inch Wide:	(includes hardware for rack or shelf mounting)
23 inch Wide:	(includes hardware for rack or shelf mounting)
9.97 inch Wide:	(for 1 to 3KW applications: surface mounting only)
7 inch Wide:	(for 1 or 2KW applications; surface mounting only)
Available in other sizes including metric. Call factory for sizes.	

MX SYSTEMS MONITOR CARD

It is now possible to monitor all of your remote power stations, anywhere, from a single location. You can have up to the minute verification that all of your remote power systems are 100% operational. Your remote power system can tell you that it is currently running at 90% of its rated capacity.

An Exeltech System Monitor card is an upgrade option for any Exeltech MX Series Redundant or Upgradeable System equipped with an Alarm Card or New MX Systems with a Transfer Switch. This new product allows customers to monitor all important aspects of their power system from any IP based Ethernet network.

Customers can monitor all system alarm functions including: Power Module fail, Control Card Fail, Over Temperature, Under DC Voltage, A-B Bus failure, System Breaker Open, and System Failure. Additionally, customers can monitor battery voltage and current usage, and System output voltage and current. All alarm functions are viewable from an LCD display located on the System Monitor Card, and Ethernet connection, or a local Rs232 connection.

Main Menu Items


The main menu consists of 9 different screens. To switch between each menu item press the MENU button. Alarm Details and System Settings have several addition screens available for viewing or changing system parameters, press the SELECT button to choose a parameter for viewing or modification of settings. Hold the MENU button down to return to the main menu screens.

Operation

Normal operation of the Monitor Card is exactly the same as a standard Exeltech Alarm Card with the notable exception of remote monitoring of system status. A blinking LED for the new alarm state announces new alarm states; pressing ether button stops the blinking, and Alarm Details will give a listing of any alarms that have activated. For a complete description of the Exeltech Alarm Card, see the Exeltech System Installation/Operation manual.

Remote Monitoring

Remote monitoring can be performed via DHCP enabled network, or RS 232 serial port. Monitoring software is included to allow remote sensing of alarm states, however, it is simple to implement custom software to meet any monitoring needs.

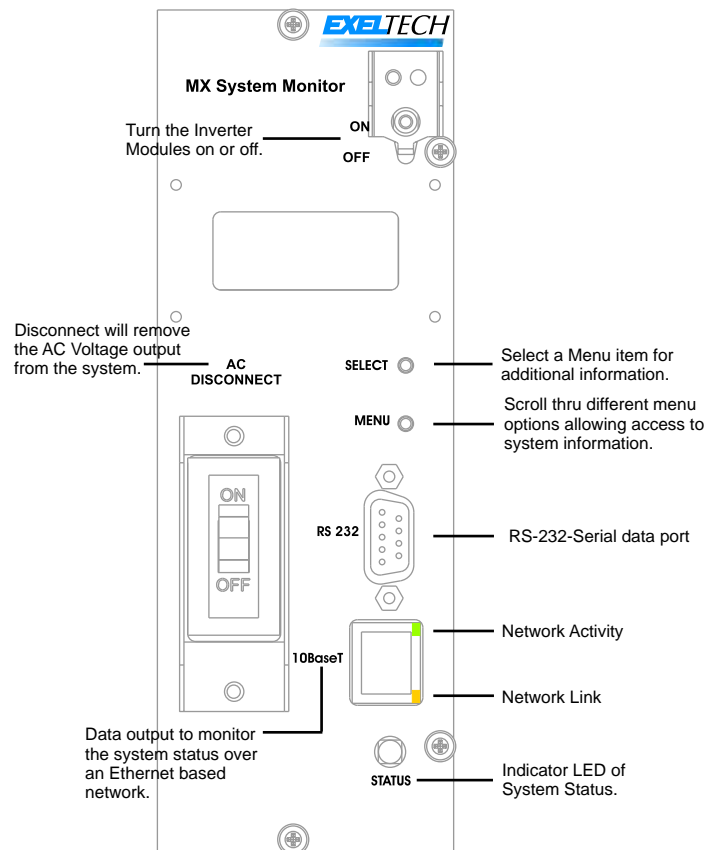

MX SOLID STATE TRANSFER SWITCH

Features


- Solid State
- Zero Switching time
- Modular Design
 - Single phase in 5, 10, 20KW
 - Split phase in 10, 20, 40KW
 - 3 Phase 15, 30, 60KW
- SNMP Monitoring
 - AC Amps
 - AC Volts
 - DC Amps
 - DC Volts
- Alarm Conditions
 - Load on alternate
 - Inverter alarms (if equipped)
- Fast AC Failure Detection (< 2 ms)
- Primary selection via front panel switch
- Optional generator start

Operation

The Exeltech Solid State Transfer Switch sets a new standard in power density and alarm capabilities. Its modular design is available in 3 power levels, 5, 10 and 20KW, which can be linked together to provide single, split, and 3 phase systems. The Switches can communicate on a SNMP protocol via TCP/IP that provides data on AC volts and amps of both the primary and secondary sources. If linked to an MX inverter system it will perform all the normal functions of the required alarm card plus communicate DC volts and amps, all inverter alarms including inverter fail, module fail, and over temperature. If the inverter is so equipped, the switch will report both DC Bus A and Bus B Voltage. Additionally, the switch can report combined Major and Minor alarms via SNMP and form C contacts. The minor alarm is triggered with any alarm, the major alarm is only triggered with complete loss of AC Voltage to the load or when a complete loss is imminent.

All good to good transfers are synchronous and performed at zero crossing. The switch will operate on the user selectable primary source until the primary source fails or operates out of limits. It will switch to the secondary source in less than 4 ms worst case. If the primary returns to normal limits, the switch will wait 15 sec for stabilization, monitor the primary and secondary source, upon assuring they are in phase, it will switch at the next available zero crossing.

The status of all available alarms, status, and measurements are available via a 2 X 8 LCD display. It is highly recommended that an Exeltech maintenance bypass switch be used in conjunction with this or any other solid state transfer switch. This switch can be used with Exeltech inverters or between any 2 AC Sources whether they be inverters, generators or utility sources.

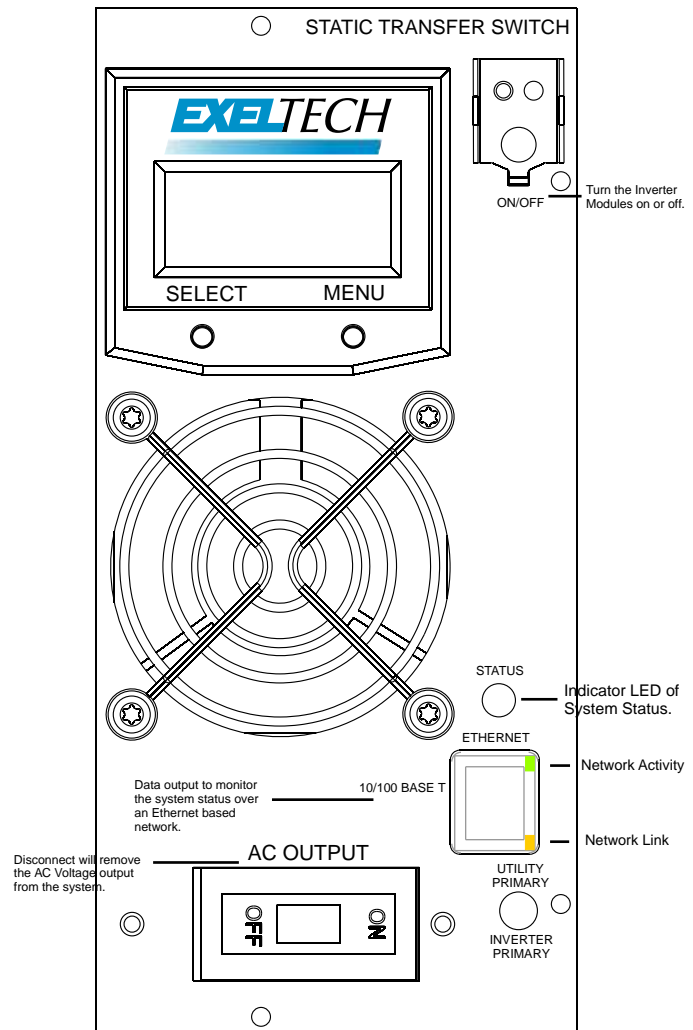

Voltage Transfer Set Point (120Vac)
 Low voltage settings: 100Vac
 High voltage settings: 130Vac

MI SERIES POWER INVERTERS



- **ULTRA LIGHTWEIGHT**
- **AVAILABLE IN 120, 240 OR 208VAC OUTPUT**
- **12, 24, 48, AND 66VDC INPUT**
- **WEATHER RESISTANT**
- **METERING**
- **2KW, 4KW OR 6KW OUTPUT**

*CAGE CODE 00MC3
NSN 6130-01-492-3067 * 6KW system*

POWER INVERTER SPECIFICATIONS

OUTPUT POWER

CONTINUOUS POWER	SURGE POWER	NO LOAD POWER	OUTPUT VOLTAGE	OUTPUT CURRENT per KW	WEIGHT LBS.
4000W	8000W	24W	1 or 2	8.3 A	32
6000W	12000W	35W	1 or 3	8.3 A	42

1 Single phase 120Vac +/- 2%
 2 Bi-phase 120/240Vac +/- 2%
 3 3 phase 120/208Vac +/- 2%

PROTECTION CIRCUITRY

Over Voltage:	Shutoff at maximum input voltage, per input conditions.
Under Voltage:	Shutoff at minimum input voltage, per input table
Thermal:	105 C internal temperature.
Output Short:	Unit shuts off: electronically limited. Manual reset required.

INPUT

MODEL VOLTAGE	MINIMUM (TYPICAL)	SYSTEM (TYPICAL)	MAXIMUM (TYPICAL)	TYPICAL EFFICIENCY @ FULL POWER	PEAK EFFICIENCY @ 1/2 POWER
24V	21V	27.6V	30V	> 88%	> 90%
48V	42V	55.2V	60V	> 88%	> 90%
66V	57.8V	75.9V	82.5V	> 88%	> 90%

ENVIRONMENTAL

Temperature:	-25°C to +25°C full power, derated -17% @ 50°C then 20% per 10°C above 50°C.
Humidity:	5 to 95% non-condensing
Cooling:	Thermostatically controlled variable speed forced air
Finish:	Powder coated
Warranty:	Two years parts and labor.

GENERAL

CONDITIONS	MINIMUM	TYPICAL	MAXIMUM
WAVEFORM	-	SINUSOIDAL	-
LINE REGULATION	-	.1%	2%
LOAD REGULATION	-	.3%	2%
DISTORTION	-	1.5%	2%
FREQUENCY*	-.1%	60Hz	+.1%

*50, 60, 400Hz nominal

MECHANICAL

Case size:	4KW 10 inches High 11 inches Deep 18 inches Wide Weight: 32 lbs.
	6KW 10 inches High 14 inches Deep 21 inches Wide Weight: 42 lbs.

XP SERIES POWER INVERTERS



XP 125



XP 250



XP 600



XP 1100



XP 2000

Made in America, **EXELTECH XP SERIES INVERTERS** are the most affordable, reliable, lightweight and best regulated, true sine wave inverters available. The **XP SERIES** inverter will operate any AC load anywhere. Ultra lightweight, yet rugged enough for the most extreme mobile environments, the **XP SERIES** is available in 100Vac, 120Vac, or 230Vac in 50Hz, 60Hz or 400Hz for land, marine or military applications, worldwide.

- TRUE SINE WAVE
- 125 WATTS TO 2000 WATTS
- 12VDC TO 108VDC INPUT
- RACK MOUNT OPTIONAL
- REMOTE SWITCHING
- 21.5 YEARS MTBF

XP SERIES PART NUMBERING SYSTEM

EXELTECH XP SERIES XP - - - - 1 - -
MODEL NUMBER

Step 1: Model number always starts with XP.

Step 2: To designate wattage enter the single character code
 1 for 125, 2 for 250, 6 for 600, K for 1100, X for 2000

Step 3: To designate output voltage enter the single character code from the Vac chart

Vac OUTPUT VOLTAGE CHART			
AC Volts	100	120	230*
Designation	0	1	3

*Not available in 125watt models

Step 4: To designate input voltage enter the single character code from the Vdc chart

Vdc INPUT VOLTAGE CHART						
DC Volts	12	24	32	48	66	108
Designation	1	2	B	4	E	I

Step 5: Output frequency is designated by using the first number of the frequency
 5 for 50Hz, 6 for 60Hz and 4 for 400 Hz

Step 6: This designates revision level (For EXELTECH use only).

Step 7: To designate option, enter the code from the option chart below. If no option is required please leave it blank.

OPTION CHART	
Option	Code
Conformal coating	07
Low idle current drain	02*
Circuit board with heat sink only	04**
50MS transfer relay	20***

* available thru a distributor only(only on XP1100W)

**available for OEM's only

***available on XP600 and XP1100 only

EXAMPLE: XP600 with 117Vac output, 12Vdc input, 60Hz with the conformal coating option would require the following model number:
XP6-1-1-6-1-07



XP SERIES POWER INVERTER SPECIFICATIONS

OUTPUT POWER

CONTINUOUS POWER	SURGE POWER	NO LOAD POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	WEIGHT LBS.
125W	150W	5W	100 +/-6%	1.2	2
125W	150W	5W	117 +/-6%	1.1	2
250W**	300W	6W	100 +/-6%	2.5	5
250W**	300W	6W	117 +/-6%	2.1	5
250W**	300W	7W	230 +/-6%	1.1	5
600W**	1100W	8W	100 +/-6%	6.0	6.5
600W**	1100W	8W	117 +/-6%	5.1	6.5
600W**	1100W	9W	230 +/-6%	2.7	6.5
1100W**	2200W	20W*	100 +/-6%	11.0	10
1100W**	2200W	20W*	117 +/-6%	9.5	10
1100W**	2200W	20W*	230 +/-6%	4.8	10
2000W	4000W	12W	100 +/-2%	20.0	15
2000W	4000W	12W	120 +/-2%	16.7	15
2000W	4000W	12W	230 +/-2%	8.7	15

*10W with X2 option , **remote switchable

INPUT POWER

MODEL VOLTAGE	MINIMUM ¹ (TYPICAL)	SYSTEM (TYPICAL)	MAXIMUM ¹ (TYPICAL)	TYPICAL EFFICIENCY @ FULL POWER	PEAK EFFICIENCY @ 1/3 POWER
**12V	10.4/10.6*	13.8V	16.5V	85%	87%
24V	19/21V*	27.6V	33V	87%	89%
32V	26.5/28V*	36.8V	44V	88%	90%
48V	41.5/42.5V	55.2V	62V	87%	89%
66V	57.5/58.5V*	75.9V	91V	88%	90%
108V	94/95V*	125V	149V	87%	90%

¹Indicates typical cut-off voltage/warning buzzer voltage

¹ +/- 3% ** Output Power derated for XPX

GENERAL

CONDITIONS	MINIMUM	TYPICAL	MAXIMUM
WAVEFORM	-	SINUSOIDAL	-
VOLTAGE OUTPUT	-5%	NOMINAL	+5%
LINE REGULATION	-	0.1%	0.5%
LOAD REGULATION	-	0.5%	1%
DISTORTION	-	1.5%	2%
FREQUENCY	-0.1%	NOMINAL	+0.1%

See www.exeltech.com for more data regarding XP Series inverters.

MECHANICAL

Case size (HxWxD)
125W case size= 2.16" X 4.93" X 7.90" (2 lbs)
250W case size= 2.77" X 5.23" X 12.03" (5 lbs)
600W case size= 3.57" X 7.69" X 12.10" (6.5 lbs)
1100W case size= 3.57" X 7.69" X 15.05" (10 lbs)
2000W case size= 4" X 9" X 18" (15 lbs)

OPTIONS

- XP Options:
- conformal coating (07 option)
 - low idle current drain (02 option)*
 - circuit board with heat sink only (04 option) many other options available for OEM applications, consult factory.

*1100 watt only

PROTECTION CIRCUITRY

- *Over Voltage: Shut off at maximum input voltage, per input conditions. Automatic reset upon fault correction.
- *Under Voltage: Shut off at minimum input voltage, per input conditions
- *Thermal: 105 C internal temperature. Warning buzz 5 C before shut off
- Output Short: Unit shuts off (manual reset)

*Automatically reset

ENVIRONMENTAL

Temperature:	-25 to 30 C full power derated 20% per 10 C, above 30 C.
Humidity:	5 to 95% non condensing
Altitude:	-200 to 10k feet full power, derated above 10k
Audible Noise:	Less than 45dba
Cooling:	600W/1100W Thermo-statically controlled forced air. 125W/250W convection cooled.
Finish:	Painted aluminum
Warranty:	Full year parts labor



Manufacturer of Quality Power Products

MCX/ICX SERIES INVERTER - CHARGER

- **2000 WATT INVERTER**
- **750-1000 WATT / 3 STATE CHARGER**
- **COMPACT**
- **LIGHTWEIGHT**
- **OPTIONAL REMOTE CONTROL / DISPLAY**
 - **ADJUSTABLE CHARGING RATE AND VOLTAGE**
 - **LEVELS VIEW SYSTEM STATUS**
- **MADE IN THE USA**



The MCX/ICX Series of Exeltech inverter/charger combines the industry leading size and weight of the XPX Series inverter, with the convenience of an integrated charging system. The three state charger is microprocessor controlled for precise battery charging. All of the standard features found in the XPX Series, such as overvoltage/undervoltage, overtemperature, and shortcircuit protection are also included in the MCX/ICX Series of inverter/charger. Additionally, the MCX/ICX can monitor battery temperature and adjust the charging voltage accordingly. The remote control display/user interface allows the user to program the unit to adjust charge rate based on battery specifications. Voltage and charge voltage levels based on battery temperature.

MCX/ICX POWER INVERTER SPECIFICATIONS

OUTPUT POWER - INVERTER MODE

CONTINUOUS POWER	SURGE POWER	NO LOAD POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	WEIGHT LBS.
2000W	4000W	10W	120 +/-2%	16.6 A	15

INPUT - INVERTER MODE

MODEL VOLTAGE	MINIMUM (TYPICAL)	SYSTEM (TYPICAL)	MAXIMUM (TYPICAL)	TYPICAL EFFICIENCY @ FULL POWER	PEAK EFFICIENCY @ 1/2 POWER
12V	10.6V	13.8V	15V	> 88%	> 90%
24V	21V	27.6V	30V	> 88%	> 90%
48V	42V	55.2V	60V	> 88%	> 90%
66V	57.8V	75.9V	82.5V	> 88%	> 90%

GENERAL - INVERTER MODE

CONDITIONS	MINIMUM	TYPICAL	MAXIMUM
WAVEFORM	-	SINUSOIDAL	-
LINE REGULATION	-	.1%	2%
LOAD REGULATION	-	1%	2%
DISTORTION	-	1.5%	2%
FREQUENCY	-1%	60Hz	+1%

CHARGER MODE - CHARGING CURRENT

BATTERY VOLTAGE	I MAX	FLOAT VOLTAGE		
		MINIMUM	TYPICAL	MAXIMUM
12V	50A*	10.6V	13.4V	15.2V
24V	33.3A	21V	26.8V	30V
48V	16.6A	42V	53.6V	60V
66V	12.1A	57.8V	80.4V	82.5V
INPUT POWER FACTOR	> 0.98			

*Specifications subject to change.

PROTECTION CIRCUITRY

Over Voltage:	Shutoff at maximum input voltage, per input table.
Under Voltage:	Shutoff at minimum input voltage, per input table.
Thermal:	105 C internal temperature.
Output Short:	Unit shuts off: electronically limited. Manual reset required.


ENVIRONMENTAL

Temperature:	-25°C to +25°C full power, derated -17% @ 50°C then 20% per 10°C above 50°C.
Humidity:	5 to 95% non-condensing
Cooling:	Thermostatically controlled variable speed forced air
Finish:	Powder coated
Warranty:	Two years parts and labor.

MECHANICAL

Case size: 18L x 9W x 4H
Weight: 15 lbs.

FC SERIES/FREQUENCY CONVERTER

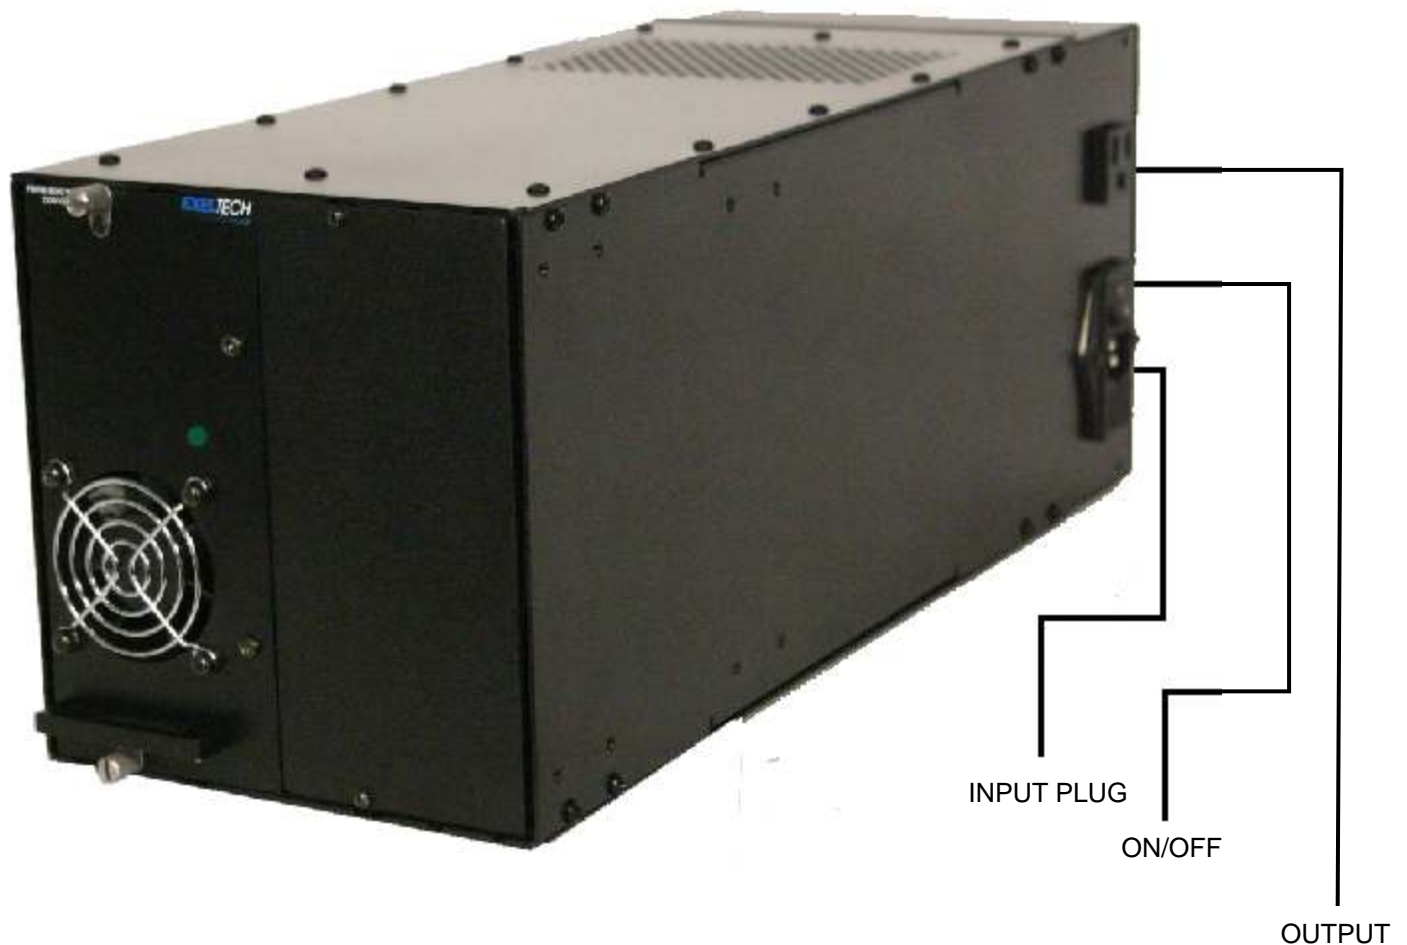

The frequency converter is operated by simply plugging in the supplied cord to the power input, connecting the load to the output plug provided, and turning the unit on. The input and output receptacle, along with the switch, are mounted on the left rear side of the enclosure.

Specifications are listed on the product label regarding maximum input and output voltages and currents.

The unit is protected against thermal and electrical overload. Electrical overloads will cause the AC voltage to collapse as the inverter limits output current. When the overload is removed, output voltage will return to normal. If the output is short circuited, the unit will latch itself off, turning the front LED red. This requires the power switch to be cycled to reset the condition (turn the unit off then back on again). Should the unit be thermally overloaded, too much load at too high a temperature, it will shut off, leaving the fan running. When the internal temperature cools sufficiently the unit will turn itself back on.

When the unit is operating normally, the LED on the front will indicate green.

FREQUENCY CONVERTER SPECIFICATIONS

INPUT

Continuous Power	Power Factor	Max Line Regulation	Voltage Range	Freq (Hz)	Module Size	Weight LBS.
500W	>0.98	0.5%	95-260Vac	47-63	A	5.5

Protection Circuitry

Thermal:	105C Internal Temperature
Output:	Current limiting with short circuit protection
Input:	Fuse protected

EFFICIENCY

250 - 500W
> 82% @ 120
> 85% @ 230

Mechanical

Three cages are available, all are 7" high by 18" deep
7 inch: "N" configuration holds 2 power modules
19 inch: "N" configuration holds 5 power modules
23 inch: "N" configuration holds 6 power modules
Module size "A" - 7" high, 3.2" wide, 15.5 " deep

OUTPUT

Model	Typical Voltage	Range	Distortion	Load Regulation
120Vac 60 Hz	120	+/- 2%	< 2%	1%
120Vac 50 Hz	120	+/- 2%	< 2%	1%
120Vac 400 Hz	120	+/- 2%	< 3%	3%
230Vac 60 Hz	230	+/- 2%	< 2%	1%
230Vac 50 Hz	230	+/- 2%	< 2%	1%

Environmental

Temperature:	-25 to 40 C full power, derated above 40C
Altitude:	-200 to 10k feet full power, derated above 10k feet
Audible noise:	> 45dbA
Cooling:	Thermostatically controlled forced air with variable speed fan
Finish:	Polyurethane based paint



XLGT SERIES TRANSFORMERLESS GRID TIE INVERTER

- **1800 WATTS**
- **96.5% EFFICIENT**
- **COMPACT**
- **LIGHTWEIGHT**
- **MADE IN THE USA**

The Exeltech XLGT string inverter provides the lowest cost, highest quality, grid interactive inverter available today. Featuring snap-in technology, natural convection cooling, no moving parts, and the latest in transformerless technology. No transformer means less weight, less cost, and greater efficiency. A built in AC/DC disconnect switch further reduces the total installed system cost. The XLGT complies with UL 1741 certification, and is housed in a NEMA 3R indoor/outdoor enclosure for maximum environmental safety and protection.



XLGT SERIES PART NUMBERING SYSTEM

EXELTECH XLGT SERIES MODEL NUMBER

XLGT 18

A

6

Step 1: Model number always starts with XLGT.

Step 2: To designate wattage (18 for 1800)

Step 3: To designate voltage

Vac OUTPUT VOLTAGE CHART	
AC Volts	120
Designation	A

Step 4: Output frequency is designated by using the first number of the frequency(6 for 60Hz)

Step 5: This space designates current revision level, and is for EXELTECH use only. If no revision is in use for this module, enter 0.

Step 6: To designate option, enter the code from the option chart below. If no option is required please leave blank.

OPTION CHART	
Option	Code
COM	01

EXAMPLES: A 120Vac, 60Hz model would require the following model number...
XLGT18A60

ELECTRICAL SPECIFICATIONS

RATING TYPE	RATING
RANGE OF OPERATING DC VOLTAGE	230 Vdc to 600 Vdc
MAXIMUM OPERATING CURRENT (DC)	10 Amps
OPERATING VOLTAGE RANGE (AC)	106 Vac - 132 Vac
OPERATING FREQUENCY RANGE	59.3Hz - 60.5Hz
MAXIMUM CONTINUOUS OUTPUT CURRENT	15.0 Amps
POWER FACTOR	> 0.99
MAXIMUM CONTINUOUS OUTPUT POWER (AC)	1800 Watts
MAXIMUM OUTPUT OVERCURRENT PROTECTION	20 Amps
EFFICIENCY	96.5%
TOTAL HARMONIC DISTORTION	< 5 %

Specifications subject to change with out notice.

PROTECTION CIRCUITRY

Thermal:	105 C internal temperature.
Output:	Current limiting

ENVIRONMENTAL

Temperature:	40 C full power, derate above 40 C.
Humidity:	0% - 100%
Altitude:	-200 to 10k feet full power, derated above 10k
Cooling:	Convection
Finish:	Polyurethane base paint

MECHANICAL


Dimensions:	17" X 9" X 5 1/2" (HxWxD) (includes mounting brackets)
Weight:	14 lbs.

See www.exeltech.com for more data regarding XLGT Series inverters.

XLGT COMMUNICATION MODULE

The XLGT Communication Module is an optional add-on that replaces the metal top cover of an XLGT. It is designed to be easy to use and report very valuable information about the power produced by the XLGT system. It has a built in wireless adapter to connect directly to an existing wireless network or to a PC with a wireless adapter. A wireless router or a computer with a wireless adapter is all that is needed to connect to the XLGT Communication Module, making a connection very easy. A computer program is provided to monitor the entire system from your own computer. The program will track the instantaneous power and display how much power has been produced in the past. The XLGT Communication Module is a low power design and only operates when the XLGT is powered on.

- Measures and reports XLGT power production
- View system status (Watt Hours, AC Voltage, Temperature, System Status)
- Reports all information via LCD display and wireless connection (802.11g)
- Provides information to calculate utility cost savings.
- Low Power (< 1.5 Watts Maximum)

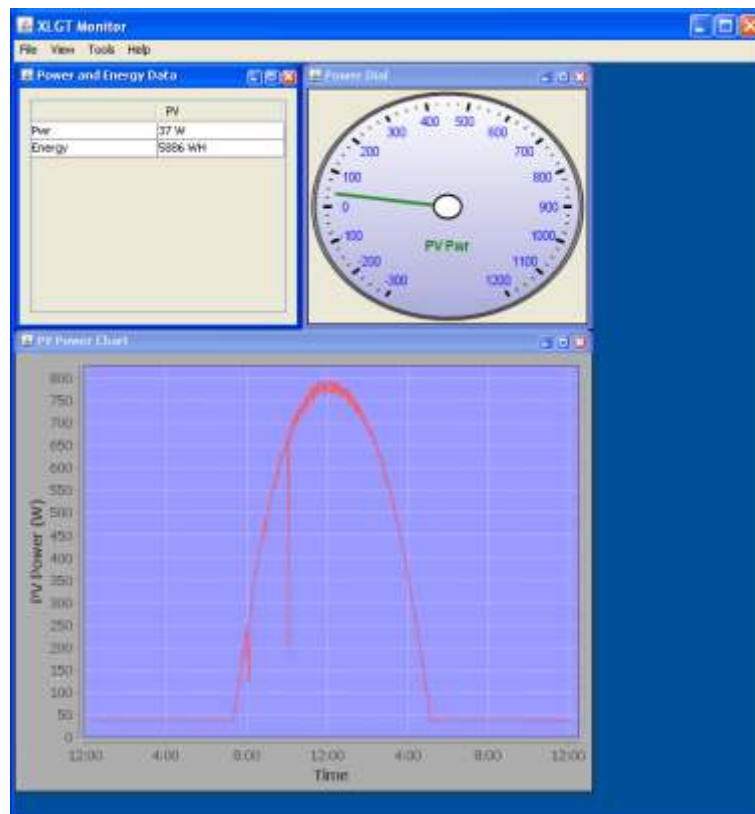

Solar Electric Systems Have Always Been Expensive .. Until Now!

What is an “PVAC Module”?

Exeltech's PVAC Modules are a fully self-contained, UL-1741-certified PV/inverter combination that produces grid-ready, sine-wave solar electricity suitable for connecting to the commercial utility grid on YOUR side of the electric meter! This can slow your meter or even spin it backwards if your system generates more power than you consume! All this without the complexity, expense, or hassles common in other systems ... even “micro-inverters”!

PVAC Module Advantages


Whether you're installing solar equipment for the first time, or adding to an existing system, Exeltech PV AC Modules are the perfect solution! They're compatible with utility power on homes, businesses, commercial and government buildings.

- Have a system already? Add PVAC Modules anyway! PVAC Modules work with existing solar equipment. Use Exeltech PVAC Modules to expand your system.
- Lack sufficient space for a full-sized system? No problem! PVAC Modules can be installed in any number to “fill in” odd-sized areas. Simply install as many as you need for 100% coverage.
- Your home or building doesn't face directly south? Non-issue! PVAC Modules can be mounted facing different directions from each other without impacting other modules in the system.
- One panel operates on ANY North American Grid System, 120 - 120/240 - 120/208.

Buy whatever your space and budget allow! Start with one PVAC Module .. or many! Add to an existing system at any time! Fill in spaces where insufficient room exists for a full “string” system.

Additional Benefits of Exeltech PVAC Modules:

- **Easy to install!** PV panels and inverters are each integrated into one unit! An astute Do-It-Yourselfer can put in a system!
- **Minimizes System Design Time and Expense!** Less hardware to handle!
- **Simplified System Assembly!** Only ONE cable to connect! AC wiring connects directly to your utility power panel with appropriate breaker!
- **Individual Microprocessor-Controlled Maximum Power Point Tracking** Operates over entire PV voltage range, increasing energy harvest!
- **Maximum Efficiency Means Maximum Monetary Return!** More money returned to you in production-based system environments!
- **Designed and Manufactured by Exeltech in Fort Worth Texas** – a 20-year old American company in the international inverter industry. We've been making solar-electric equipment since 1990!

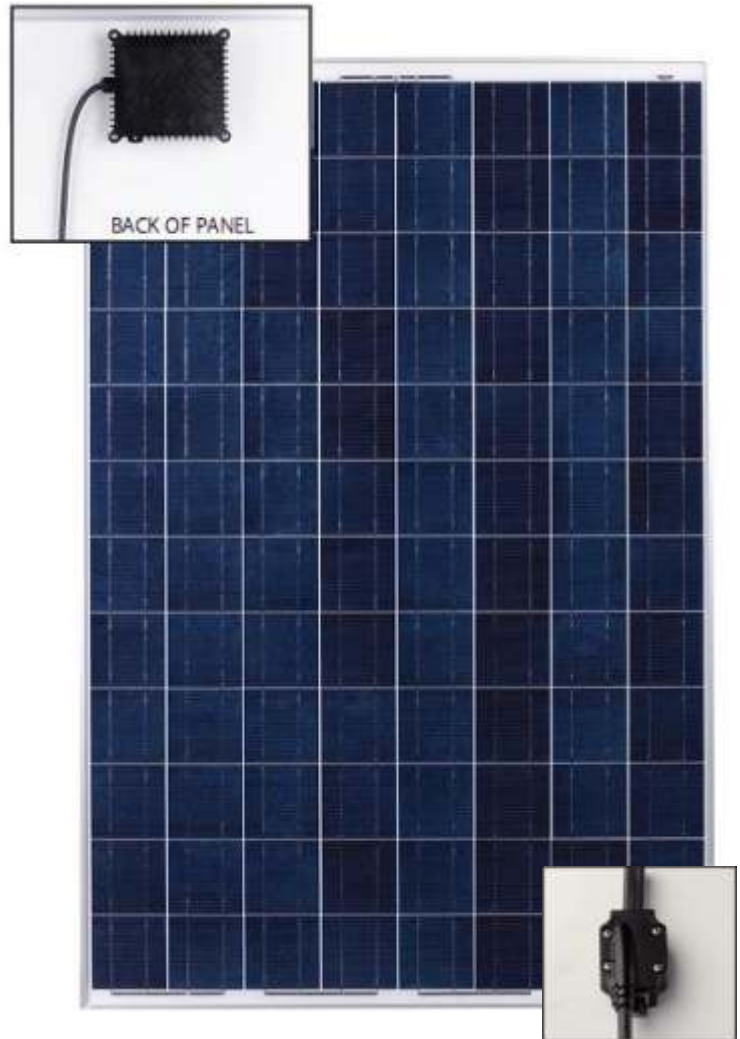

Electrical Specifications (AM24-1-B-6-0-00)

Input Power	240 watts
AC Output	120Vac, 60 Hz (nominal), 1.8 amps
Maximum AC Output Power	216 watts (nominal)
Electrical Operating Range	108-132VAC, 59.3 to 60.5 Hz in accordance with the UL1741 Safety Standard
Power Factor	> .99 (typical)
Total Harmonic Distortion (THD)	< 5%
Peak Efficiency	95.8% (California Energy Commission weighted efficiency: 94.5%)
Maximum Power Point Tracking	Yes. Over the solar panel's full operating range.
Minimum Feed-In Power	< 1 watt (PVAC Modules will begin delivering power to the grid at less than one watt)
Standby Power Consumption	0 watts (AC Modules derive no power from the AC utility grid)
Nighttime Power Consumption	0 watts (PVAC Modules derive no power from the utility, so no wasted energy!)
Data Logging	Yes. With optional "HelioSentry®" available from Exeltech.

Environmental Specifications

AC Enclosure	NEMA 4X, anodized aluminum, all stainless steel hardware.
Operating Temperature Range	-40°C to +70°C (valid at any output power, including max output wattage)
Storage Temperature	Same as operating.
Humidity	0 to 100% condensing
Surge Protection	IEEE 62.41 Class B
Ventilation	Convection cooled. No moving parts.

Mechanical Specifications

Width x Length x Height	41.9" (1065 mm) x 62.8" (1596 mm) x 2" (5.08 cm)
Weight overall	49.6 lbs (22.5 kg)

Certifications

ETL Certified to UL 1741, CSA Standard 22.2, CSA Standard 22.2 No. 107.1-1, IEEE 1547, IEEE 929
PV Certified to UL 1703 Standard for Photovoltaics
Federal Communications Commission 47CFR, Part 15, Class B
Surge Rated to IEEE 62.41 Class B
California Energy Commission Peak efficiency: 95.8%. CEC weighted efficiency: 94.5% (verified by independent lab tests)
Fully Compliant with the National Electric Code (NEC 1999-2008)

Technical Support

Technical Support	M-F, 7:00 am – 5:00 pm Central time, e-mail, phone. All support based in the USA.
Warranty	20 years



7317 JACK NEWELL BLVD NORTH
FORT WORTH, TX 76118-7100
(817) 595-4969 FAX (817) 595-1290
1-800-866-4683
www.exeltech.com



Manufacturer of more than 35,000 different true sine wave power inverters, chargers, and related products. More than 20 years of Exeltech's inverter manufacturing experience and support behind every Exeltech product. We provide the emergency backup power systems for the Communications Center in every US Embassy, worldwide...

Proud holder of and the ONLY American inverter manufacturer to qualify for the prestigious TL9000 Quality Assurance Certification (far exceeds ISO 9001:2000)!

(Specifications subject to change without notice.)

HELIOSENTRY



- **Connects AC modules to the utility grid**
- **Switch to disconnect power going to the PV system**
- **Measures and reports AC Module power and power from the utility grid (with an external sensor)**
- **Reports all information via LCD display and wireless connection (802.11g)**
- **Provides information to calculate utility cost savings.**
- **Wifi Enabled (802.11g)**
- **View individual status of each AC Module attached**



HELIOSENTRY

The Heliosentry is an all in one solution that addresses every aspect of connecting AC Modules to a home. It collects and reports data from the PV system, the energy used in the home and weather information that impacts performance of the Solar system and energy use. It also provides the necessary hardware to terminate the PV system and interface the home wiring to meet all local code requirements. It greatly simplifies the installation of an AC Module system.

If you can measure it – you can track it – you can save it. This is the design cornerstone of the Heliosentry. It measures and stores everything in your home and PV system. With this data you can **see** how much energy you are generating and using, **know** what your remaining electric bill is in real time, and then generate habits to **reduce** your energy requirements. When coupled with Heliosentry Software you can see your homes energy use anywhere, anytime.

Data features

Collects for each AC Module in the system -

Output Current, Output Voltage, Panel Voltage, Inverter Temperature, status codes. This data is collected every minute while power is generated

Measures and Collects system data -

PV power generated, Utility power used (or sent back), Irradiance measured with external sensor, Temperature of up to 3 external temperature sensors all with user selectable time intervals from 1 min to 1 hour. Alarms if surge protection is compromised.

Calculates and stores -

PV, Utility , and total power used for user definable time intervals from 1 sec to 1 hr

PV, Utility, and energy used, per day (35 days), per week (53 weeks) , per month (13 months), per year (2 years) and all time and 8 user selectable time frame.

Min and Max temperature, Peak irradiance, Peak power, irradiance at peak power, Temperature at peak power, irradiance*hours, and Degree*hours. This information can be used to benchmark your system performance over time. This data is stored for 1 year and can be downloaded with supplied software.

Integrated Hardware features

AC disconnect switch, provides disconnect required by many municipalities

Connections for 2 strings of AC Modules.

Connections for both phases of AC house power.

Electronics to measure AC Volts, Amps for PV and Home power.

Electronics to measure irradiance sensor and 3 external temperature sensors

Surge protection and monitoring to protect your Renewable Energy Investment

802.11g wireless communications to home computer.

4 by 20 character back-light display for data.

(Specifications subject to change with out notice)

XO SERIES POWER INVERTERS



EXELTECH manufactures some of the most reliable inverter systems available. Power levels are expandable, and modules can be added or replaced in the field. The XO system can be configured for power levels from 2 to 6KW with 120 VAC output, 240 VAC bi-phase or 208 VAC 3 phase.

The XO system is extremely compact and lightweight. Power modules weigh only 12 lbs each. Output voltage is precisely regulated, so that no measurable voltage change occurs on the output as input voltage fluctuates. Typically, less than 1.2 volt change in output voltage will occur when the output load varies from 0 to 100% of rated power.

With distortion of 2% maximum, this inverter offers the cleanest sine wave power available. Models are available which cover 24, 48 and 66VDC battery systems. Custom models can be designed to meet your specific input voltage requirements.

- **EXPANDABLE**
- **TRUE SINE WAVE**
- **2000 WATT MODULES**
- **EXTREMELY LIGHTWEIGHT**
- **COMPACT**
- **MICRO PROCESSOR CONTROLLED**

XO SERIES SYSTEM PART NUMBER

EXELTECH XO SERIES MODEL NUMBER

* * * - - - - -

STEP # 1 Model number always starts with XO

STEP # 2 Cage assembly

7	9
7" XO	9" XO

STEP # 3 Configuration

1 phase	2 phase	3 phase
B	E	F

STEP # 4 Enter three asterisks (*)

STEP # 5 Character assignment by EXELTECH to represent changes or revision levels.

STEP # 6 To designate power level, enter the number or modules required. (* if none used)

STEP # 7 Enter from the following character code
Q = 100Vac, M = 120Vac, O = 230Vac

STEP # 8 To designate input voltage, enter the single character from the VDC voltage chart below:

VDC INPUT VOLTAGE CHART			
DC VOLTS	24	48	66
DESIGNATION	2	4	E

STEP # 9 Output frequency is designated by using the first number of the frequency. 5 for 50Hz, 6 for 60Hz, 4 for 400Hz

STEP # 10 Character assigned by EXELTECH to represent revision level of Power Modules.

STEP # 11 For options, enter two digit code. If no option enter (00).

EXAMPLE: XO9B***-3ME6-01

POWER INVERTER SPECIFICATIONS

OUTPUT POWER

CONTINUOUS POWER	SURGE POWER	NO LOAD POWER	OUTPUT VOLTAGE	OUTPUT CURRENT per KW	WEIGHT LBS.
2000W	4000W	12W	1	8.3 A	15
4000W	8000W	24W	1, 2	8.3 A	28.6
6000W	12000W	35W	1, 3	8.3 A	37

- 1 Single phase 100Vac, 120Vac +/- 2%
 2 Bi-phase 100/200Vac, 120/240Vac +/- 2%
 3 3 phase 100/173Vac, 120/208Vac +/- 2%

PROTECTION CIRCUITRY

Over Voltage:	Shutoff at maximum input voltage, per input table.
Under Voltage:	Shutoff at minimum input voltage, per input table.
Thermal:	105 C internal temperature.
Output Short:	Unit shuts off: electronically limited. Manual reset required.

INPUT

MODEL VOLTAGE	MINIMUM (TYPICAL)	SYSTEM (TYPICAL)	MAXIMUM (TYPICAL)	TYPICAL EFFICIENCY @ FULL POWER	PEAK EFFICIENCY @ 1/2 POWER
24V	21V	27.6V	30V	> 88%	> 90%
48V	42V	55.2V	60V	> 88%	> 90%
66V	57.8V	75.9V	82.5V	> 88%	> 90%

ENVIRONMENTAL

Temperature:	-25°C to +25°C full power, derated -17% @ 50°C then 20% per 10°C above 50°C.
Humidity:	5 to 95% non-condensing
Cooling:	Thermostatically controlled variable speed forced air
Finish:	Powder coated
Warranty:	Two years parts and labor.

GENERAL

CONDITIONS	MINIMUM	TYPICAL	MAXIMUM
WAVEFORM	-	SINUSOIDAL	-
LINE REGULATION	-	.1%	2%
LOAD REGULATION	-	1%	2%
DISTORTION	-	1.5%	2%
FREQUENCY	-1%	60Hz	+1%

MECHANICAL

Case size:	7" Case HOLDS UP TO 2 MODULES 9 inches High 18 inches Deep 7 inches Wide Weight: 28 lbs.
	9" Case HOLDS UP TO 3 MODULES 9 inches High 18 inches Deep 9 inches Wide Weight: 37 lbs.

COMPANY PROFILE

EXELTECH was founded in 1990, based on the philosophy that efficiencies in the manufacturing process through product design, coordinated with facility layout, was paramount to productivity and the key to a quality product. Our mission is to provide leadership electronics and superior customer service through the merging of innovative designs with advanced manufacturing technology.

Quality through design for manufactureability is a primary goal. Utilizing surface mount technology, all design and manufacturing is performed in our facility, located in FORT WORTH, TEXAS. "Pick and place" machines are set up with parts that are standard to all models, allowing for zero setup time and eliminating errors created when reloading or setting up machines. Only large capacitors and magnetics are placed by hand, in an effort to minimize human error through automation. Hand soldering is eliminated through the use of vapor phase reflow. Point to point wiring is eliminated with extensive use of PCB's to perform interconnectivity functions. The use of extruded aluminum for mechanics has reduced the number of nut/bolt and screw points to one-fourth that of previous products, while increasing heat dissipation efficiency and lending a functional form factor to the product.

While design of the products to comply with automated manufacturing processes continues, our people remain the most important part of the quality equation. All employees go through a six month internship before becoming full-time staff members. All employees are cross trained for multi-task capability. Using a PULL system, each station performs a quality check on the performance of the previous station. Data for first time yield and DPU is recorded and analyzed by each station and test bench in an ongoing effort to yield a zero defect process. Upon final assembly, all products then proceed to A.L.T. for "accelerated life testing" to minimize "infant mortality". Packaging and shipping procedures are constantly evaluated to reduce damage.

All repairs are performed at the factory for quality feedback and input for future design. The net result of these philosophies is a line of products that demonstrates an MTBF(mean time between failure) in excess of 20 years and offers the most competitively priced true sine wave inverters available anywhere.

Our commitment to quality and total customer satisfaction has allowed EXELTECH to become innovators in the DC to AC power product market. A few of our "firsts" include; The smallest, lightest high frequency PWM sine wave inverter. The first "N+1" redundant inverter systems, "hot" swappable capability and "modular" design. Our many satisfied customers include AT&T, BROOKHAVEN NATIONAL LABS, DIGITAL EQUIPMENT CORPORATION, MOTOROLA, MCI, GTE GOVERNMENT SYSTEMS and numerous federal and state agencies. We are found quite literally, around the world. We also provide back up power for the communications room in every U.S. Embassy worldwide.

Give us the opportunity to help solve your power problem.



7317 Jack Newell Blvd North Fort Worth, Texas 76118-7100 voice- 817.595.4969 fax- 817.595.1290 toll free- 800.886.4683