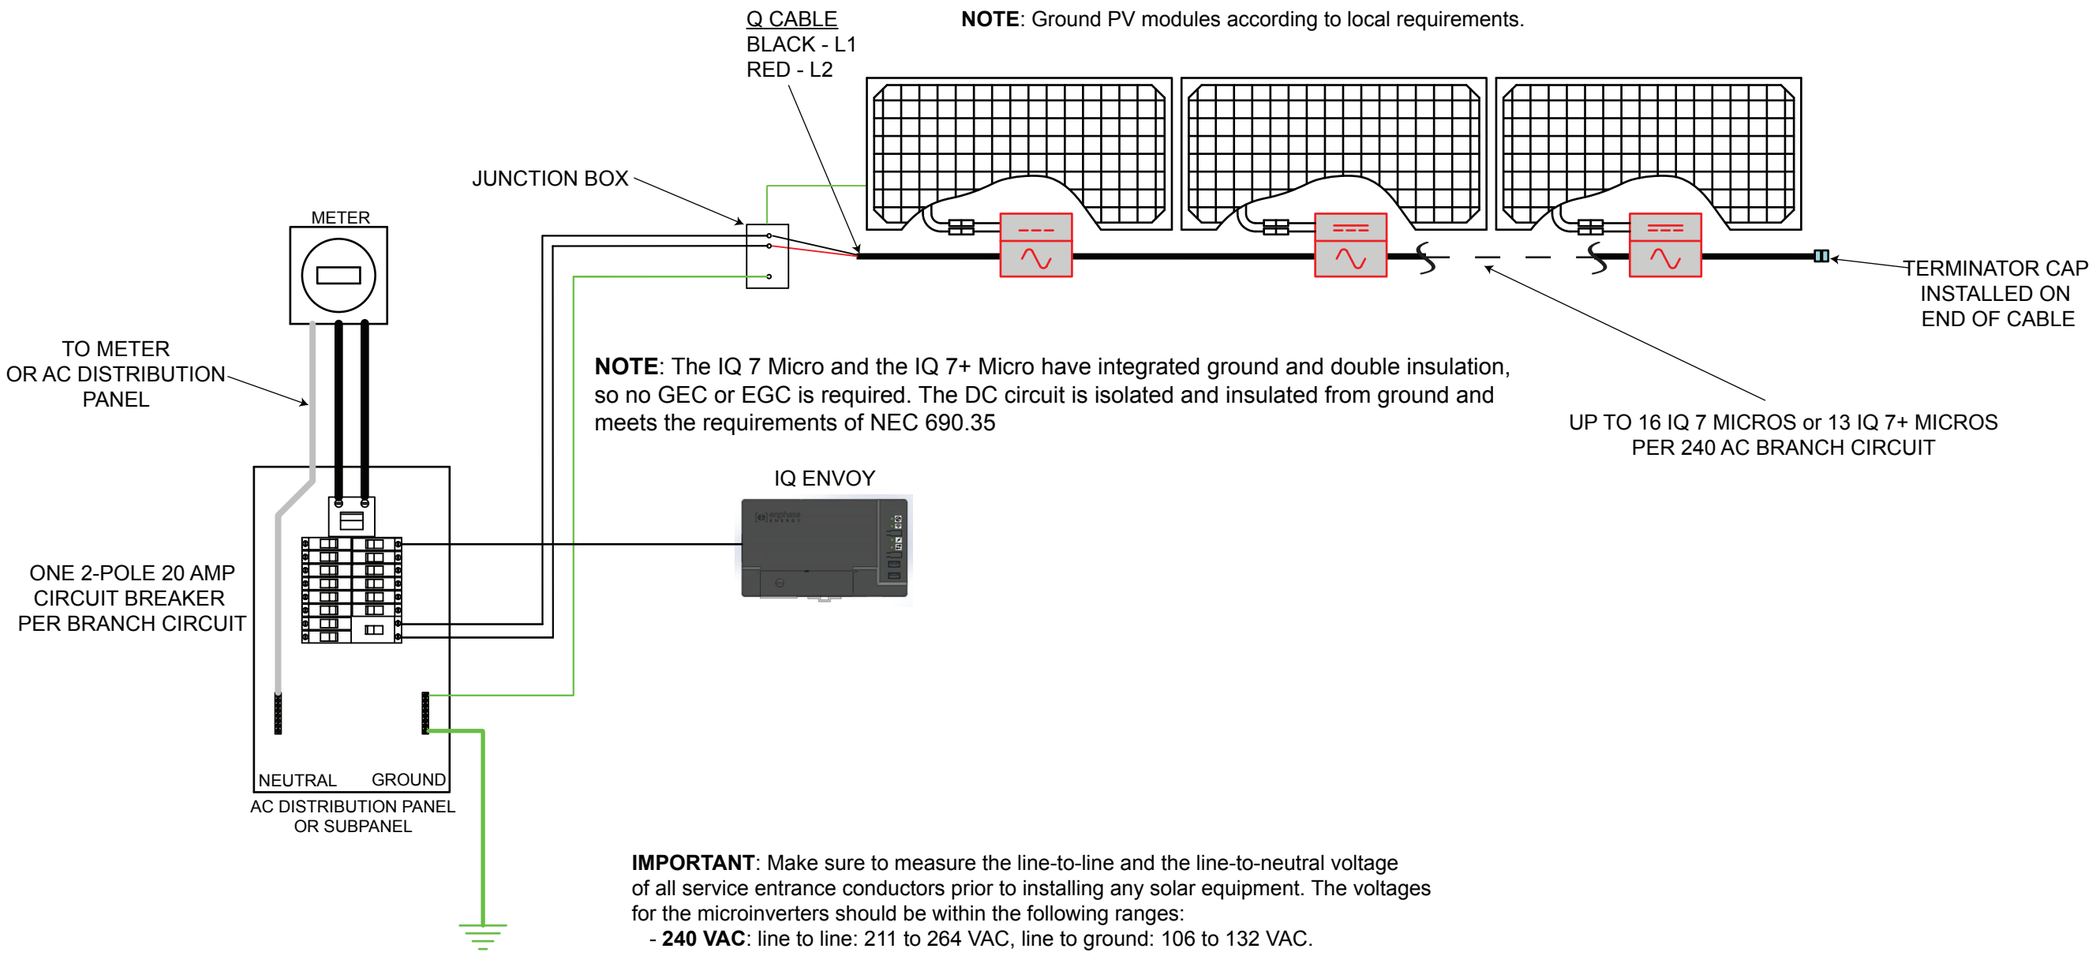

NOTE: Ground PV modules according to local requirements.

NOTE: The IQ 7 Micro and the IQ 7+ Micro have integrated ground and double insulation, so no GEC or EGC is required. The DC circuit is isolated and insulated from ground and meets the requirements of NEC 690.35

IMPORTANT: Make sure to measure the line-to-line and the line-to-neutral voltage of all service entrance conductors prior to installing any solar equipment. The voltages for the microinverters should be within the following ranges:

- **240 VAC**: line to line: 211 to 264 VAC, line to ground: 106 to 132 VAC.
- **208 VAC**: line to line: 183 to 229 VAC, line to ground: 106 to 132 VAC.

ENPHASE IQ 7 and IQ 7+ MICROINVERTER FIELD WIRING DIAGRAM

© 2017 Enphase Energy Inc. All rights reserved