



KD 300-80 F Series

KD320GX-LFB KD325GX-LFB

CUTTING EDGE TECHNOLOGY


As a pioneer with over 38 years in the solar energy industry, Kyocera demonstrates leadership in the development of solar energy products. Kyocera's *Kaizen* Philosophy, commitment to continuous improvement, is shown by repeatedly achieving world record cell efficiencies.

QUALITY BUILT IN

- UV stabilized, aesthetically pleasing black anodized frame
- Supported by major mounting structure manufacturers
- Easily accessible grounding points on all four corners for fast installation
- Proven junction box technology with 12 AWG PV wire to work with transformerless inverters
- Quality locking plug-in connectors to provide safe and quick connections

RELIABLE

- Proven superior field performance
- Tight power tolerance
- First module manufacturer to pass rigorous long-term testing performed by TÜV Rheinland

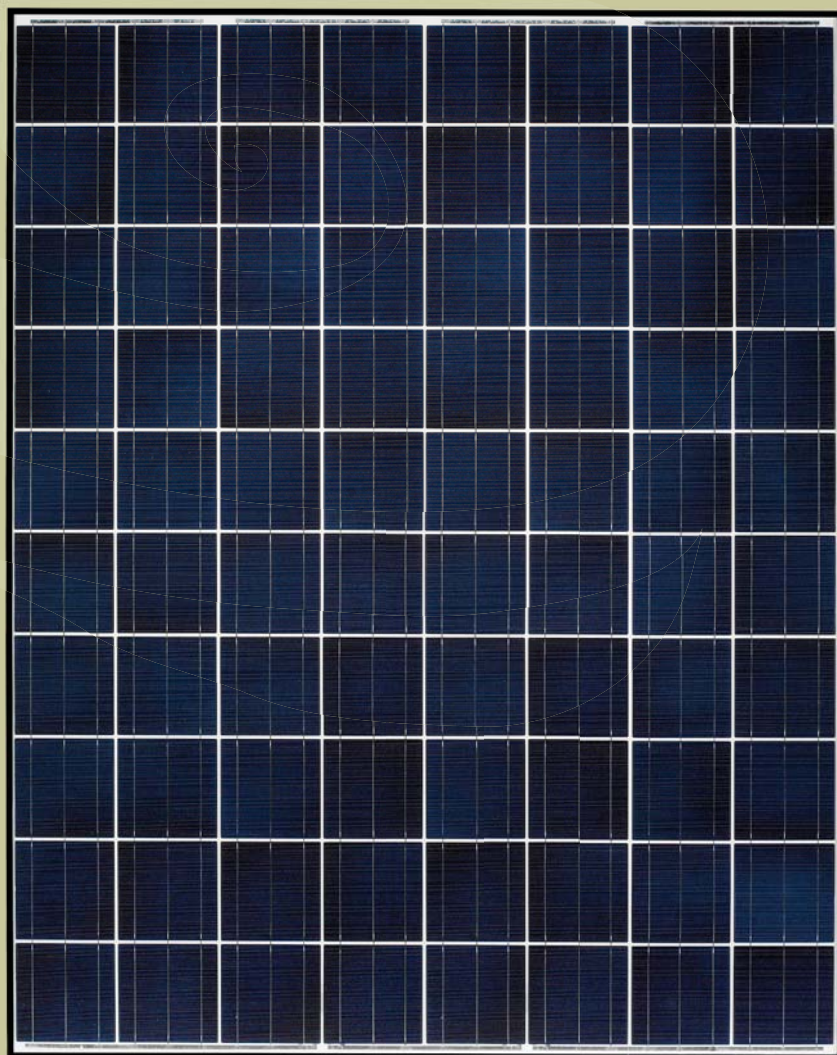

QUALIFICATIONS AND CERTIFICATIONS



NEC 2008 Compliant, UL 1703, and ISO 14001

UL1703 Certified and Registered, UL Fire Safety Class C, CEC, FSEC

ELECTRICAL SPECIFICATIONS

Standard Test Conditions (STC) <i>STC = 1000 W/M² irradiance, 25°C module temperature, AM 1.5 spectrum*</i>			
	KD325GX-LFB	KD320GX-LFB	
P _{max}	325	320	W
V _{mp}	40.3	40.1	V
I _{mp}	8.07	7.99	A
V _{oc}	49.7	49.5	V
I _{sc}	8.69	8.60	A
P _{tolerance}	+5/-3	+5/-3	%

Nominal Operating Cell Temperature Conditions (NOCT) <i>NOCT = 800 W/M² irradiance, 20°C ambient temperature, AM 1.5 spectrum*</i>			
T _{NOCT}	45	45	°C
P _{max}	234	230	W
V _{mp}	36.2	36.1	V
I _{mp}	6.47	6.40	A
V _{oc}	45.5	45.3	V
I _{sc}	7.04	6.96	A
PTC	287.8	283.3	W


Temperature Coefficients			
P _{max}	-0.45	-0.45	%/°C
V _{mp}	-0.47	-0.51	%/°C
I _{mp}	0.025	0.0065	%/°C
V _{oc}	-0.36	-0.36	%/°C
I _{sc}	0.060	0.060	%/°C

Operating Temp	-40 to +90	-40 to +90	°C
----------------	------------	------------	----

System Design	
Series Fuse Rating	15 A
Maximum DC System Voltage (UL)	600 V
Hailstone Impact	1 in (25mm) @ 51mph (23m/s)

* Subject to simulator measurement uncertainty of +/- 3%. KYOCERA reserves the right to modify these specifications without notice.

NEC 2008 COMPLIANT
UL 1703 LISTED




010614

MODULE CHARACTERISTICS

Dimensions: <i>length/width/height</i>	65.43in/51.97in/1.8in (1662mm/1320mm/46mm)
Weight:	60.6lbs (27.5kg)

PACKAGING SPECIFICATIONS

Modules per pallet:	20
Pallets per 53' container:	22
Pallet box dimensions: <i>length/width/height</i>	66in/53in/47in (1675mm/1330mm/1190mm)
Pallet box weight:	1323 lbs (600kg)

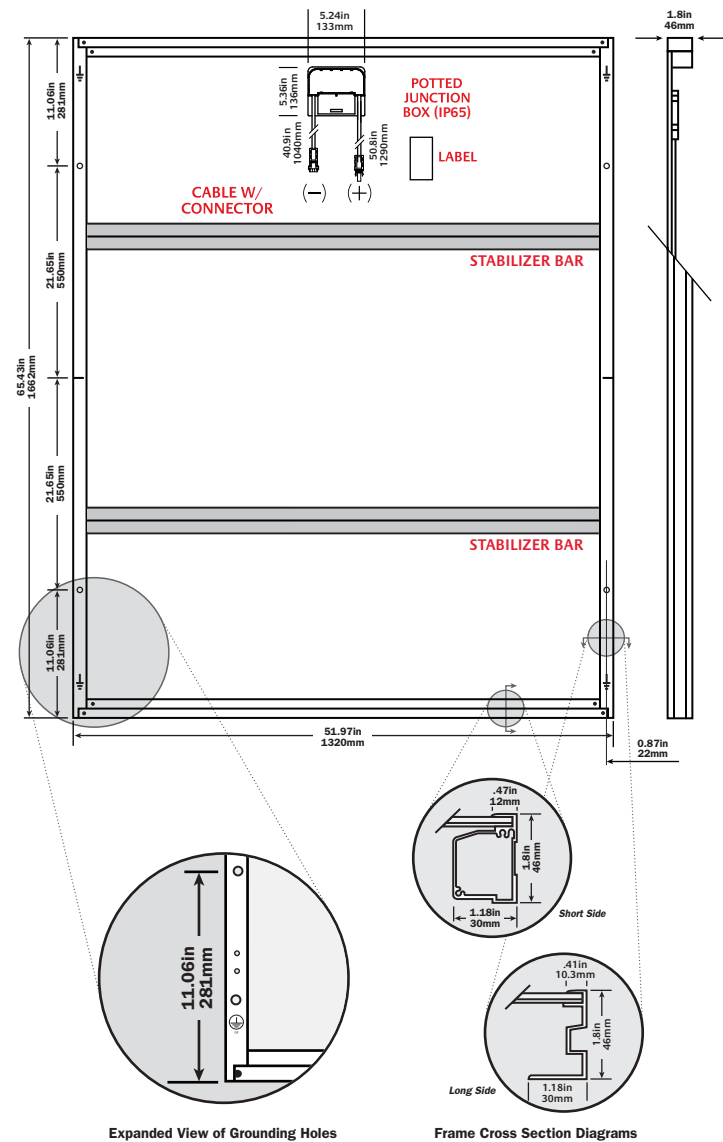

Expanded View of Grounding Holes

Frame Cross Section Diagrams

Legend		
○ MOUNTING HOLES .35in (9mm)	● DRAINAGE HOLES	⊕ GROUND HOLE .28in (7mm) (with symbol ⊕ & GR)

OUR VALUED PARTNER

