



solar electricity

300 WATT

MULTI-PURPOSE MODULE

NEC 2008 Compliant



ND-F4Q300

MULTI-PURPOSE 300 WATT
MODULE FROM THE WORLD'S
TRUSTED SOURCE FOR SOLAR.

Using breakthrough technology, made possible by nearly 50 years of proprietary research and development, Sharp's ND-F4Q300 solar module incorporates an advanced surface texturing process to increase light absorption and improve efficiency. Common applications include commercial and residential grid-tied roof systems as well as ground mounted arrays. Designed to withstand rigorous operating conditions, this module offers high power output per square foot of solar array.

Business leaders install this module in large commercial applications, demonstrating financial astuteness and environmental stewardship.

ENGINEERING EXCELLENCE

High module efficiency for an outstanding balance of size and weight to power and performance.

DURABLE

Tempered glass, EVA lamination and weatherproof backskin provide long-life and enhanced cell performance.

RELIABLE

25-year limited warranty on power output.

HIGH PERFORMANCE

This module uses an advanced surface texturing process to increase light absorption and improve efficiency.



Sharp multi-purpose modules offer industry-leading performance for a variety of applications.



Improved Frame Technology

SHARP: THE NAME TO TRUST

The Sharp ND-F4Q300 module is covered by Sharp's 10 year materials or workmanship warranty. When you choose Sharp, you get more than well-engineered products. You also get Sharp's proven reliability, outstanding customer service and the assurance of our 25-year limited warranty on power output. A global leader in solar electricity, Sharp powers more homes and businesses than any other solar manufacturer worldwide.

BECOME POWERFUL

300 WATT

ND-F4Q300

NEC 2008 Compliant

Module output cables: 12 AWG PV Wire

ELECTRICAL CHARACTERISTICS

Maximum Power (Pmax)*	300 W
Tolerance of Pmax	0%/5%
Type of Cell	Polycrystalline silicon
Cell Configuration	72 in series
Open Circuit Voltage (Voc)	45.1 V
Maximum Power Voltage (Vpm)	35.2 V
Short Circuit Current (Isc)	8.94 A
Maximum Power Current (Ipm)	8.52 A
Module Efficiency (%)	15.3%
Maximum System (DC) Voltage	1000 V
Series Fuse Rating	15 A
NOCT	46.2 °C
Temperature Coefficient (Pmax)	-0.439%/°C
Temperature Coefficient (Voc)	-0.321%/°C
Temperature Coefficient (Isc)	0.050%/°C



*Illumination of 1 kW/m² (1 sun) at spectral distribution of AM 1.5 (ASTM E892 global spectral irradiance) at a cell temperature of 25°C.

MECHANICAL CHARACTERISTICS

Dimensions (A x B x C below)	39.1" x 77.6" x 1.8"/994 x 1971 x 46 mm
Cable Length (G)	43.3"/1100 mm
Output Interconnect Cable	12 AWG with SMK Locking Connector
Weight	50 lbs / 22.7 kg
Max Load	30 psf (1440 Pascals)
Operating Temperature (cell)	-40 to 194°F / -40 to 90°C

**PV Wire per UL Subject 4703

QUALIFICATIONS

UL Listed	UL 1703	
Fire Rating	Class C	
IEC Listed	IEC 61215 / IEC 61730	

WARRANTY

25-year limited warranty on power output
Contact Sharp for complete warranty information


Design and specifications are subject to change without notice. Sharp is a registered trademark of Sharp Corporation. All other trademarks are property of their respective owners. Cover photo: Solar installation by Pacific Power Management, Auburn CA.



SHARP®

SHARP ELECTRONICS CORPORATION
5700 NW Pacific Rim Boulevard, Camas, WA 98607
1-800-SOLAR-06 • Email: sharpsolar@sharpusa.com
www.sharpusa.com/solar

DIMENSIONS

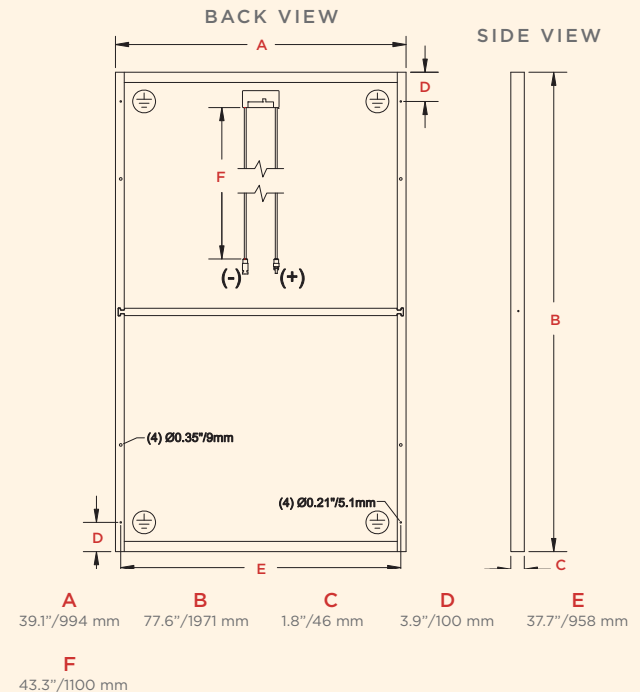

Contact Sharp for tolerance specifications

"BUY AMERICAN"

Sharp solar modules are manufactured in the United States and Japan, and qualify as "American" goods under the "Buy American" clause of the American Recovery and Reinvestment Act (ARRA).



Blue Pacific Solar

